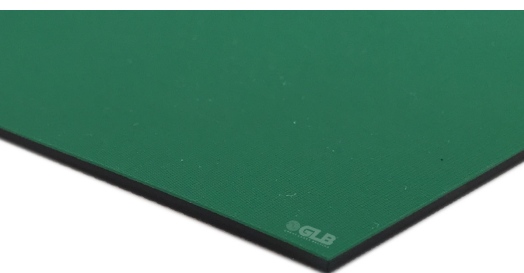


## #70: MAM 04H CONVEYOR BELT


[Request a Quote](#)

[Request a Sample](#)

Main Industry Segments: Postal/mail sorting. Belt Applications: Feeder belt; Folder belt; Letter transport belt; Machine tape; Mail handling/mail sorting belt; Paper handling belt; Sheeter/Crosscutter belt. Special Features: Abrasion resistant on both sides; Constant and gentle positive grip; Dimensionally stable; Elastic. Mode of Use/Conveyance: Declined; Horizontal; Inclined; Twists with short center distance; Vertical.

PLIES: 1 | TOP COVER: GREEN FINE STRUCTURE HAMID FABRIC | BOTTOM COVER: BLACK NBR

**Tags:** [Abrasion Resistant](#), [Incline](#), [Printing](#)

### TECHNICAL DATA

BELT THICKNESS:	1.45 mm	0.060"
PULLEY DIAMETER (MIN.):	15 mm	0.6"
PULLEY DIAMETER (MIN.)	mm	"
BACK FLEXING:		
BELT WEIGHT:	1.4 kg/m <sup>2</sup>	0.29 lb/ft <sup>2</sup>
PRODUCTION WIDTH:	1200 mm	47"
BREAKING STRENGTH:		
TENSION FOR 1% ELONGATION:	2.6 N/mm	15 lbs/in
MAX. ADMISSIBLE BELT TENSION (EQUAL TO 1.8% STRETCH):		
OPERATING TEMPERATURE:	-20° to -4° C	-22° to 140° F

### BELT CONSTRUCTION

TOP MATERIAL COVER:	Fabric
SURFACE FINISH:	Fine Structure Hamid
PROPERTY:	
COLOR:	Green
BOTTOM COVER MATERIAL:	NBR
SURFACE FINISH:	Rough Structure
COLOR:	Black

### BELT FABRIC

TOP PLY:	
INNER PLIES:	
BOTTOM PLY:	
TOTAL NO. OF PLIES	1

### BELT CHARACTERISTICS

	YES	NO
Permanently Anti-Static	✓	
Nosebar Suitable		✗
Powerturn Suitable		✗
Slider Bed Suitable	✓	
Troughed Application Suitable	✓	
FDA / USDA Approved		✗
Low Noise		✗
Flame Retardant		✗
Suitable for Metal Detector		✗
Abrasion Resistant	✓	